



Simply Brilliant



High CRI



Dimmable



## Product information

### FEATURES

- 4FT 35/28/20 wattage selectable
- 4550/3640/2600 130LM/W
- DLC Premium<sup>1</sup>, cETL listed
- 0-10v dimmable
- Internal color selector switch to 3500K/4000K/5000K
- Row mounted to 8FT with strip connector kit
- 50,000 hour life
- Polycarbonate diffuse (frosted) lens
- Damp location rated
- Quick & easy installation and maintenance
- No tools required to open/close the fixture
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Hallways
- Walkways
- Storage areas
- Utility rooms
- Common areas


### INSTALLATION

- Surface mount
- Ceiling/Cable Mount (optional)

### ADDITIONAL INFO

- White housing
- Operating temperature -20°C ~+50°C
- Motion sensor (optional)
- Air craft cable (optional)
- Strip Connector Kit (L2420-9400)

### DIAGRAM

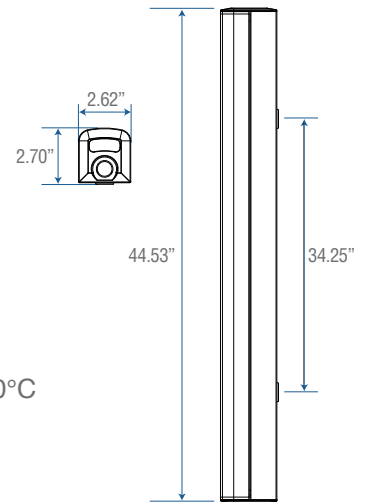

ORDER CODE	MODEL NO.	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	CRI	THD	MOL (IN)	CASE QTY.
L2420-3300	ILX-VS3-435WSMV3CCT	S-7QWTA1	4' 35/28/20W STRIP FIXTURE 3CCT DIM WH	20		2600	3500K				
				28	120-347V	3640	4000K	83+	<20%	44.53x2.62x2.70	6
				35		4550	5000K				
<b>OPTIONAL ACCESSORIES</b>											
L2420-9400	CONNECTOR PLATE FOR ROW MOUNTING										
L2850-0002	60" AIR CRAFT SUSPENSION CABLE / PACK OF TWO (2)										

<sup>1</sup>DLC Premium: S-7QWTA1 Stairwell and Passageway Luminaires. DLC Standard: S-COV2L7 Direct Linear Ambient Luminaires

### MODEL EXAMPLE ILX-VS3-435WSMV3CCT

ILX	VS2	4	35WS	MV	3CCT
Brand	Series	Size	Wattage	Voltage	CCT
illuminex	VISTA Series III	2=2FT 4=4FT	20W 28W 35W	MV=120-347V Blank=120-277V	3 Co-related Color Temperature Blank=Single Color Temperature

**ILLUMINEX TECHNOLOGIES INC.**

Tel: 1-905-264-6670 Toll Free: 1-844-985-1590 Fax: 1-905-264-6671

Email: [csr@illuminexled.com](mailto:csr@illuminexled.com) | Website: [www.illuminexled.com](http://www.illuminexled.com)

Head Office: 1-1 Keyes Court, Vaughan, ON L4H 4V6